

FIREPRO CENTABUILD

HEAD OFFICE: AUCKLAND (09) 579 0367
CHRISTCHURCH (03) 379 9364

www.firepro.co.nz sales@firepro.co.nz

CI/SfB

B350, DATASHEET – Oct 17

Product specifications
can change. Contact
us to ensure you have
our latest datasheet

FIREPRO B350

WALL ACCESS FIRE RATED HATCH

- Provides access through fire rated walls.
- plaster board walls
- Simple to Install.
- Big range of Sizes.

FIRE TESTING

B350 – 120 mins integrity
114 minute insulation (FRR -/120/90)
when installed in walls of appropriate fire
rating.
Fire Test FLP 31335.

SIZES

B350 Stock Sizes
(all measurements are nominal)

Dimension A	Dimension B	Dimension C
300 x 300mm	= A Plus 40mm	= A Less 100mm
400 x 400mm	"	"
510 x 510mm	"	"
600 x 600mm	"	"
710 x 510mm	"	"
800 x 600mm	"	"
920 x 620mm	"	"

INSTALLATION


Trim opening to suit overall hatch dimensions with minimum clearance.

Fit hatch and plumb up. Screw fix frame with screws provided to holes already drilled using a No. 2 Phillips cross recess bit - do not overdrive. Screws provided are for timber or steel framed walls. For concrete wall installation replace with appropriate steel fastenings.

Seal trimming gap around hatch and framing with Firepro intumescent fire sealant to both sides 10mm deep. Any gaps wider than 20mm will need additional sealant depth.

Refer to sealant data sheet.

Fit 90 degree Slim Angle provided and leave ready for stopping and painting.

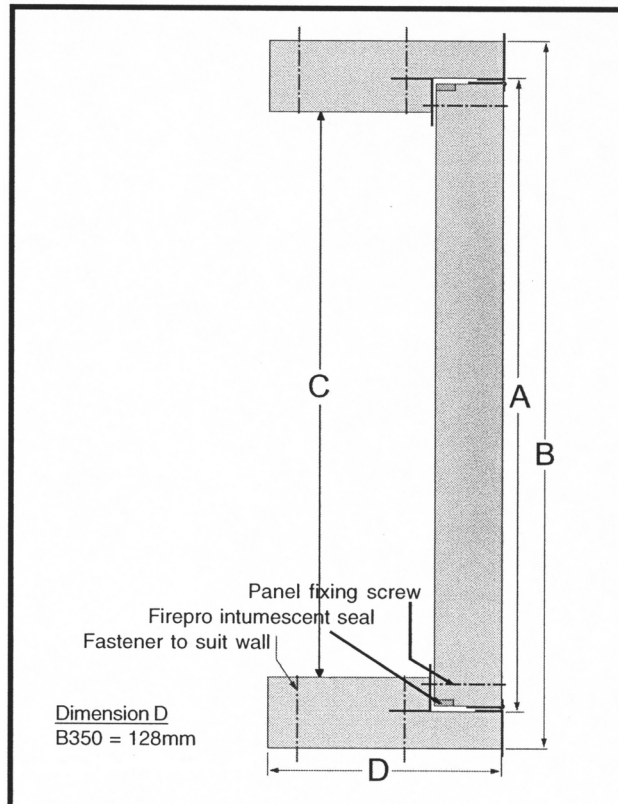

NOTE: The technical information and suggestions for use and application presented herein represent the best information available to us and are believed to be reliable. If used beyond the situations detailed on this datasheet we advise confirming their suitability before installation. All dimensions are nominal.

We reserve the right to make changes or to withdraw designs and products without notice.